

BREWERY
HOSE



APPLICATION

A flexible hose for suction and delivery applications, used in food and beverage industries. Developed especially for breweries, it is also suitable for use of alcohol with concentration levels of up to 96%. Also suitable for drinking water supply according to WRAS.



MATERIAL


Tube UPE, transparent, smooth, food quality, grease resistant, suitable for drinking water.
Cover SBR/NR/EPDM, red, abrasion resistant, ozone and weather resistant, cloth impression.
Reinforcement textile wrapped, zinc plated steel wire helix, copper wire.







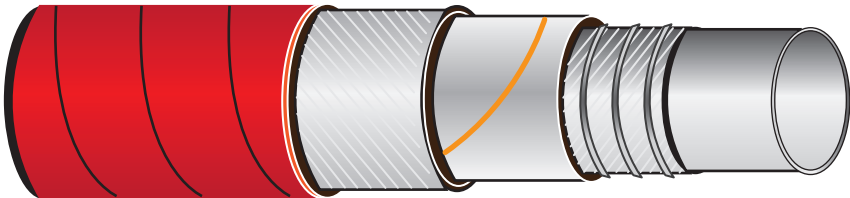


COLOUR
Red



TEMPERATURE
-35°C / + 95°C
up to max 130°C / 30min, unpressurised.



SPECIFICATIONS

PART NUMBER	 I.D.	 O.D.	 REEL	 W.P.	 B.P.	 Weight	 Bend radius
	MM	MM	LENGTH (M)	BAR	BAR	KG	MM
ASP-ALC25-40	25	37	40	12	37.8	0.90	150
ASP-ALC32-40	32	44	40	12	37.8	1.25	170
ASP-ALC40-40	40	54	40	12	37.8	1.70	230
ASP-ALC50-40	50	64	40	12	37.8	2.05	300
ASP-ALC65-40	65	79	40	12	37.8	2.55	390
ASP-ALC75-40	75	90	40	12	37.8	3.00	450
ASP-ALC80-40	80	100	40	12	37.8	4.60	480
ASP-ALC100-40	100	120	40	12	37.8	6.00	600

SAFETY FACTOR 3.15:1