

LPG DELIVERY
HOSE



APPLICATION

Softwall hose suitable for delivery of liquefied petroleum gas and natural gas.
Meets AS1869:2012/H



MATERIAL

Tube - extruded black smooth synthetic rubber.
Cover - black, smooth (wrapped finish), synthetic rubber, weathering.
Reinforcement - high strength synthetic yarn.
Electrical Resistance - electrical resistance < 1 x10² Ω on service lengths assured through copper wires.




COLOUR

Black



TEMPERATURE

-50°C to + 65°C

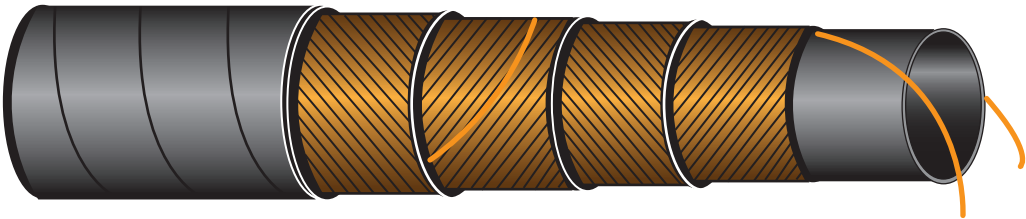

SPECIFICATIONS

PART NUMBER	 I.D.	 O.D.	 REEL	 W.P.	 B.P.	 Weight	 Bend radius
	MM	MM	LENGTH (M)	BAR	BAR	KG	MM
AIVG-L019-60	19	32	60	25	100	0.65	160
AIVG-L025-60	25	38	60	25	100	0.81	200
AIVG-L032-60	32	46	60	25	100	1.08	250
AIVG-L050-60	50.8	67	60	25	100	1.84	400

SAFETY FACTOR 4:1

