

OIL SUCTION  
HOSE



**APPLICATION**  
Lightweight and flexible hose for oil suction, corrugated with a flame proof cover. Suitable for use with oil with aromatic content of 30% (except oil with ester base).




**MATERIAL**  
**Tube** - Smooth Black NBR,  
**Cover** - Black Corrugated with wrap finish, CR Rubber resistant to abrasion and weathering.  
**Reinforcement** - 2 high tensile synthetic cord with single helix reinforced steel wire.







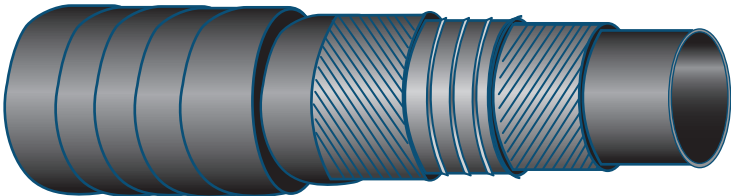


**COLOUR**  
Black



**TEMPERATURE**  
-30°C to + 120°C



SPECIFICATIONS

PART NUMBER	 I.D.	 VACUUM	 REEL	 W.P.	 B.P.	 Weight	 Bend radius
	MM	BAR	LENGTH (M)	BAR	BAR	KG	MM
OILS-19-60	19	0.5	60	5	15	0.40	50
OILS-25-60	25	0.5	60	5	15	0.50	65
OILS-32-60	32	0.5	60	5	15	0.61	85
OILS-38-60	38	0.5	60	5	15	0.69	105
OILS-51-60	51	0.5	60	5	15	1.01	150
OILS-63-60	63	0.5	60	5	15	1.23	185
OILS-76-60	76	0.5	60	5	15	1.68	240
OILS-102-60	102	0.5	60	5	15	2.51	345

SAFETY FACTOR 3:1