

PETROL DISPENSER
HOSE



APPLICATION

Dispensing commercial unleaded and deisel fuel, from vehicle and marine service station pumps.
Meets AS/NZ 2683:2000



MATERIAL

Tube - Oil resistant synthetic rubber.
Cover - Oil and weather resitant synthetic rubber.
Reinforcement - Braided high tensile hose wire, or high tensile synthetic textile with static conductor wire.




COLOUR

Black





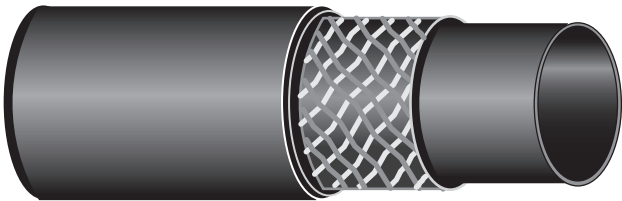


TEMPERATURE

-40°C to + 60°C



SPECIFICATIONS

PART NUMBER	 I.D	 O.D	 REEL	 W.P	 B.P
	MM	MM	LENGTH (M)	KPA	KPA
GPO601 GPO1001	19.1 25.4	27.8 35.6	50 50	2000 2000	6000 6000

SAFETY FACTOR 3:1

