

PETROL DISPENSER
HOSE



APPLICATION
Dispensing commercial unleaded and deisel fuel, from vehicle and marine service station pumps.
Meets AS/NZ 2683:2000




MATERIAL
Tube - Oil resistant synthetic rubber.
Cover - Oil and weather resitant synthetic rubber.
Reinforcement - Braided high tensile synthetic textile with static conductor wire.








COLOUR
Black

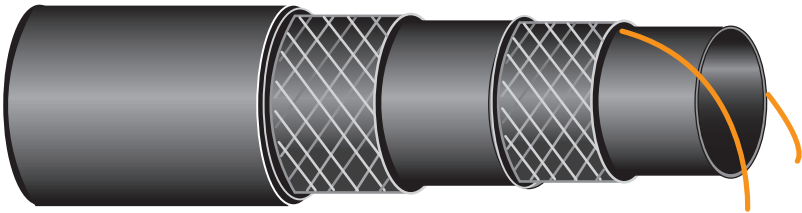

TEMPERATURE
-40°C to + 60°C



SPECIFICATIONS

PART NUMBER	 I.D	 O.D	 REEL	 W.P	 B.P
	MM	MM	LENGTH (M)	KPA	KPA
GPO502	15.9	26	50	2000	6000

SAFETY FACTOR 3:1