

LPG SERVICE/FILL
HOSE



APPLICATION

High performance low extractable veneer layed service and fill lines for automobiles.
Meets AS1869:2012 Class G. AGA No7435



MATERIAL

Tube - synthetic rubber.
Cover - textile braid.
Reinforcement - stainless steel wire braid.
Lining - Nylon Resin




COLOUR

Black



TEMPERATURE

-20°C to + 125°C

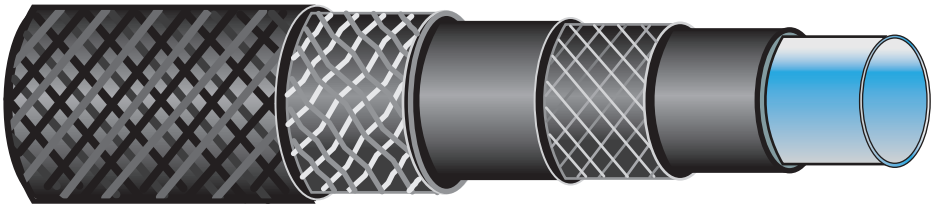

SPECIFICATIONS

PART NUMBER	 I.D	 O.D	 REEL	 W.P	 B.P	 Bend radius
	MM	MM	LENGTH (M)	MPA	MPA	MM
VEX-8-100 VEX-10-100	8 10	17.1 19.5	30-100 30-100	2.6 2.6	10.4 10.4	136 156

SAFETY FACTOR 4:1