

LPG (THERMOFLEX)
HOSE



APPLICATION
High performance low extractable thermoplastic. Service and fill lines for automobiles. Meets performance requirements of AS1869:2012 Class G. AGA No. 7656




MATERIAL
Tube - thermoplastic flexible special polyamide elastomer.
Cover - micro perforated self-extinguishing polyurethane.
Reinforcement - braid-polyester fibre.







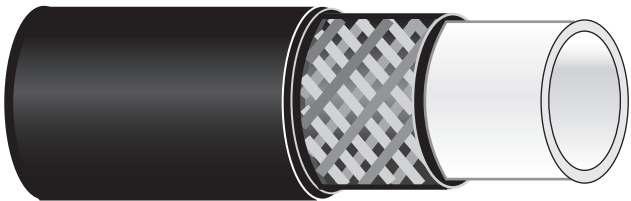

COLOUR
Black



TEMPERATURE
-20°C to + 125°C



SPECIFICATIONS

PART NUMBER	 I.D.	 O.D.	 REEL	 W.P.	 B.P.	 Bend radius
	MM	MM	LENGTH (M)	BAR	BAR	MM
THERMO- 6G	6.4	12.8	100	30	120	60

SAFETY FACTOR 4:1