

VAPOUR INJECTION HOSE



APPLICATION

For low pressure delivery of LPG in automobiles.



MATERIAL

Tube - synthetic rubber
Cover - synthetic rubber.
Reinforcement - synthetic braid




COLOUR

Black



TEMPERATURE

-25°C to + 125°C

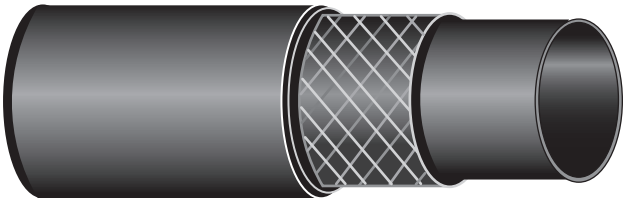

SPECIFICATIONS

PART NUMBER	 I.D.	 O.D.	 REEL	 W.P.	 B.P.
	MM	MM	LENGTH (M)	BAR	BAR
VIH-4	4	10	25 or 100	5	20
VIH-5	5	11	25 or 100	5	20
VIH-6	6	13	25 or 100	5	20
VIH-10	10	17	25 or 100	5	20
VIH-12	12	19	25 or 100	5	20
VIH-16	16	24	25 or 100	5	20

SAFETY FACTOR 4:1