


BLUESTAR AD BLUE DELIVERY

APPLICATION Softwall hose for the transfer of 32.5% urea aqueous solution (AUS 32) according to spec. ISO 22241, that dramatically reduces the amount of NOx in diesel transport vehicles (SCR technology), in agreement with the goals EURO IV, Euro V and Euro VI.

MATERIAL **Tube** – Black, smooth, antistatic ($R < 1 \text{ m}\Omega/\text{m}$), and sulphur free EPDM rubber.
No contamination of the additive as per ISO 22241-2 Method I - CERISIE analysis RP.n. 273/2014
Cover – Black, smooth, antistatic ($R < 1 \text{ m}\Omega/\text{m}$), EPDM rubber compound, ozone, heat and weather resistant.
Reinforcement – High strength synthetic textile fabrics.

COLOUR Black

TEMPERATURE – 40°C to + 100°C
peaks to 120°C

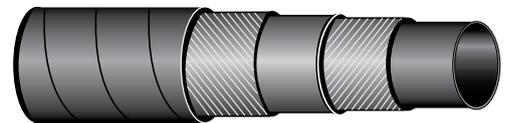

| PART NO. |  I.D. |  O.D. |  REEL |  W.P. |  B.P. |  BEND |  WEIGHT |
|--------------|---|---|---|---|---|---|---|
| | MM | MM | LENGTH (M) | BAR | BAR | MM | KG/M |
| BLUE-08-100 | 8 | 15 | 100 | 20 | 60 | 50 | 0.16 |
| BLUE-10-90 | 10 | 17 | 90 | 20 | 60 | 60 | 0.19 |
| BLUE-13-60 | 13 | 20 | 60 | 20 | 60 | 80 | 0.23 |
| BLUE-16-60 | 16 | 26 | 60 | 20 | 60 | 100 | 0.27 |
| BLUE-16LP-60 | 16 | 23 | 60 | 10 | 30 | 100 | 0.43 |
| BLUE-19LP-50 | 19 | 27 | 50 | 10 | 30 | 115 | 0.37 |
| BLUE-19-50 | 19 | 30 | 50 | 20 | 60 | 115 | 0.56 |
| BLUE-25-40 | 25 | 36 | 40 | 10 | 30 | 150 | 0.68 |
| BLUE-25-40 | 25 | 37 | 40 | 20 | 60 | 150 | 0.76 |

SAFETY FACTOR 3:1