











BALANCE LINE HOSE

-  APPLICATION For protection of electrical wiring and cables.
-  MATERIAL **Tube** – Nylon corrugated.
-  COLOUR Black
-  TEMPERATURE – 30°C to + 150°C

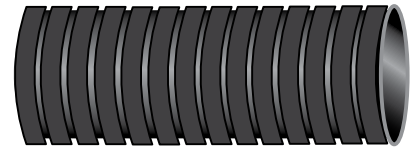




PART NO.	 I.D.	 O.D.	 REEL	 W.P.	 B.P.
	MM	MM	LENGTH (M)	BAR	BAR
GN13	13	16.8	100	N/A	N/A
CR27	28	33.7	100	N/A	N/A
ARPC010-200	10.4	14.3	100	N/A	N/A

CABLE TIES

-  APPROVALS UI, GI, Lloyd, DNV. Flamability Rating UL 94V-2.
-  MATERIAL UI, Approved NYI on 66.
-  COLOUR Black
-  TEMPERATURE 85°C MAX



PART NO.	 STRENGTH	 O.D.	 LENGTH
	KG	MM	LENGTH (M)
CV - 2.5 X 100	8	2.5	100
CV - 4.8 X 200	22	4.8	203