

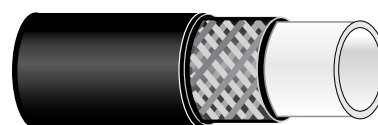
THERMOFLEX LPG SERVICE LINE






 **APPLICATION** High performance low extractable thermoplastic. Service and fill lines for automobiles.
Meets performance requirements of AS1869:2012 Class G. AGA No. 7656.

 **MATERIAL** **Tube** – Thermoplastic flexible special polyamide elastomer.
Cover – Micro perforated self-extinguishing polyurethane.
Reinforcement – Braid-polyester fibre.

 **COLOUR** Black

 **TEMPERATURE** – 20°C to 125°C



PART NO.	 I.D	 O.D	 REEL	 W.P	 B.P
	MM	MM	LENGTH (M)	BAR	BAR
THERMO- 6G	6.4	12.8	100	26	120


SAFETY FACTOR 4:1

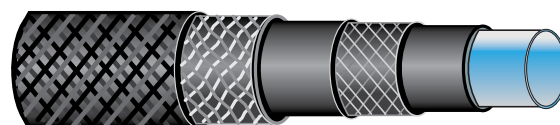
VEX LPG SERVICE & FILL LINE






 **APPLICATION** High performance low extractable veneer layed service and fill lines for automobiles.
Meets AS1869:2012 Class G. AGA No7435.

 **MATERIAL** **Tube** – Synthetic rubber.
Cover – Textile braid.
Reinforcement – Stainless steel wire braid.
Lining – Nylon Resin.

 **COLOUR** Black

 **TEMPERATURE** – 20°C to + 125°C



PART NO.	 I.D	 O.D	 REEL	 W.P	 B.P
	MM	MM	LENGTH (M)	BAR	BAR
VEX-8-100	8	17.1	30-100	26	104
VEX-10-100	10	19.5	30-100	26	104

SAFETY FACTOR 4:1