


PETROKING PETROL PUMP YARN

APPLICATION Dispensing commercial unleaded and diesel fuel, from vehicle and marine service station pumps.
Meets: AS/NZ22683:2000.

MATERIAL **Tube** – Oil resistant synthetic rubber.
Cover – Oil and weather resistant synthetic rubber.
Reinforcement – High tensile synthetic textile with static conductor wire.

COLOUR Black

TEMPERATURE – 40°C to + 60°C

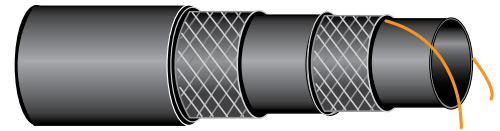

PART NO.	I.D	O.D	REEL	W.P	B.P
	MM	MM	LENGTH (M)	BAR	BAR
GPO502	15.9	26	50	20	60

SAFETY FACTOR 3:1


PETROKING PETROL PUMP STEEL

APPLICATION Dispensing commercial unleaded and diesel fuel, from vehicle and marine service station pumps.
Meets: AS/NZ22683:2000.

MATERIAL **Tube** – Oil resistant synthetic rubber.
Cover – Oil and weather resistant synthetic rubber.
Reinforcement – Braided high tensile hose wire.

COLOUR Black

TEMPERATURE – 40°C to + 60°C

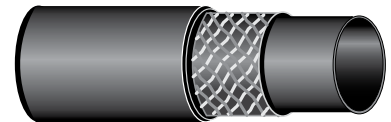

PART NO.	I.D	O.D	REEL	W.P	B.P
	MM	MM	LENGTH (M)	BAR	BAR
GPO601	19.1	27.8	50	20	60
GPO1001	25.4	35.6	50	20	60

SAFETY FACTOR 3:1