

## TOTALFOOD TOTAL FOOD DELIVERY

**APPLICATION** Softwall hose for suction and delivery of many food products such as olive oil, wine, beer, fruit juices, fatty foods, milk and alcohol up to 96 deg.

**Standards Met** – Reg. EC 1935/4 and CE 2023/06. Phthalates free. PAHs free (according to ZEK 01.4-08 cat. 1) Bisphenol A free. Heavy Metal tested. FDA 21 ART. 177.2600 aqueous and fatty foods. 3-A Sanitary Standards no. 1803 Class 2 foods. D.M 21/03/73 aqueous fatty foods and alcohol up to 96.


**MATERIAL** **Tube** – White, smooth, food quality, taste free and odourless synthetic rubber. 100% Phthalates free.

**Cover** – Blue, smooth (wrapped finish) synthetic rubber, ozone and weathering resistant.

**Reinforcement** – High strength synthetic cord and embedded helix wire.

**COLOUR** Blue

**TEMPERATURE** – 30°C to + 100°C

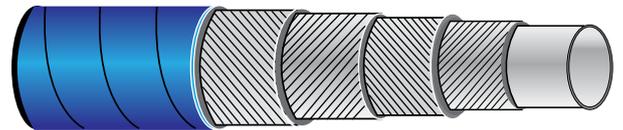

| PART NO.     |  I.D |  O.D |  REEL |  W.P |  B.P |  WEIGHT |
|--------------|---|---|--|--|---|--|
|              | MM  | MM  | LENGTH (M)   | BAR  | BAR   | KG/MT  |
| TOTAL-13-60  | 13  | 26  | 60   | 10   | 30  | 0.47   |
| TOTAL-16-60  | 16  | 30  | 60   | 10   | 30  | 0.58   |
| TOTAL-19-60  | 19  | 33  | 60   | 10   | 30  | 0.66   |
| TOTAL-25-60  | 25  | 39  | 60   | 10   | 30  | 0.82   |
| TOTAL-32-60  | 32  | 46  | 60   | 10   | 30  | 1.01   |
| TOTAL-38-60  | 38  | 52  | 60   | 10   | 30  | 1.16   |
| TOTAL-40-60  | 40  | 54  | 60   | 10   | 30  | 1.21   |
| TOTAL-51-60  | 51  | 65.5  | 60   | 10   | 30  | 1.56   |
| TOTAL-60-60  | 60  | 76.5  | 60   | 10   | 30  | 2.05   |
| TOTAL-63-60  | 63.5  | 80  | 60   | 10   | 30  | 2.17   |
| TOTAL-76-60  | 76  | 94  | 60   | 10   | 30  | 2.76   |
| TOTAL-80-60  | 80  | 98  | 60   | 10   | 30  | 2.9  |
| TOTAL-100-60 | 100   | 118   | 60   | 10   | 30  | 3.55   |